


NOTES

1. PREPARE EXISTING POLYURETHANE SURFACES BY THOROUGH CLEANING WITH A BIO-DEGRADABLE DETERGENT AS APPROVED BY THE COATING MANUFACTURER. ALLOW TO DRY COMPLETELY.
2. APPLY MIRACOTE 500W PRIMER OVER EXISTING POLYURETHANE SURFACE AT A RATE OF 300 TO 350 SF PER GALLON.
3. ALLOW PRIMER TO ACHIEVE A TACK FREE CONDITION BEFORE OVERCOATING WITH MPC DECK COATING. OPEN TIME FOR MIRACOTE 500W PRIMER SHALL NOT EXCEED 16 HOURS (HIGH EVAPORATION RATES) TO 24 HOURS (LOW EVAPORATION RATES), DEPENDING ON ATMOSPHERIC CONDITIONS. REPRIME IF OPEN TIME HAS BEEN EXCEEDED. CONSULT WITH MANUFACTURER AS CONDITIONS MAY REQUIRE.
4. INSTALL MIRACOTE MPC DECK COATING SYSTEM IN ACCORDANCE WITH WRITTEN SPECIFICATIONS AND MANUFACTURER'S INSTALLATION GUIDELINES.

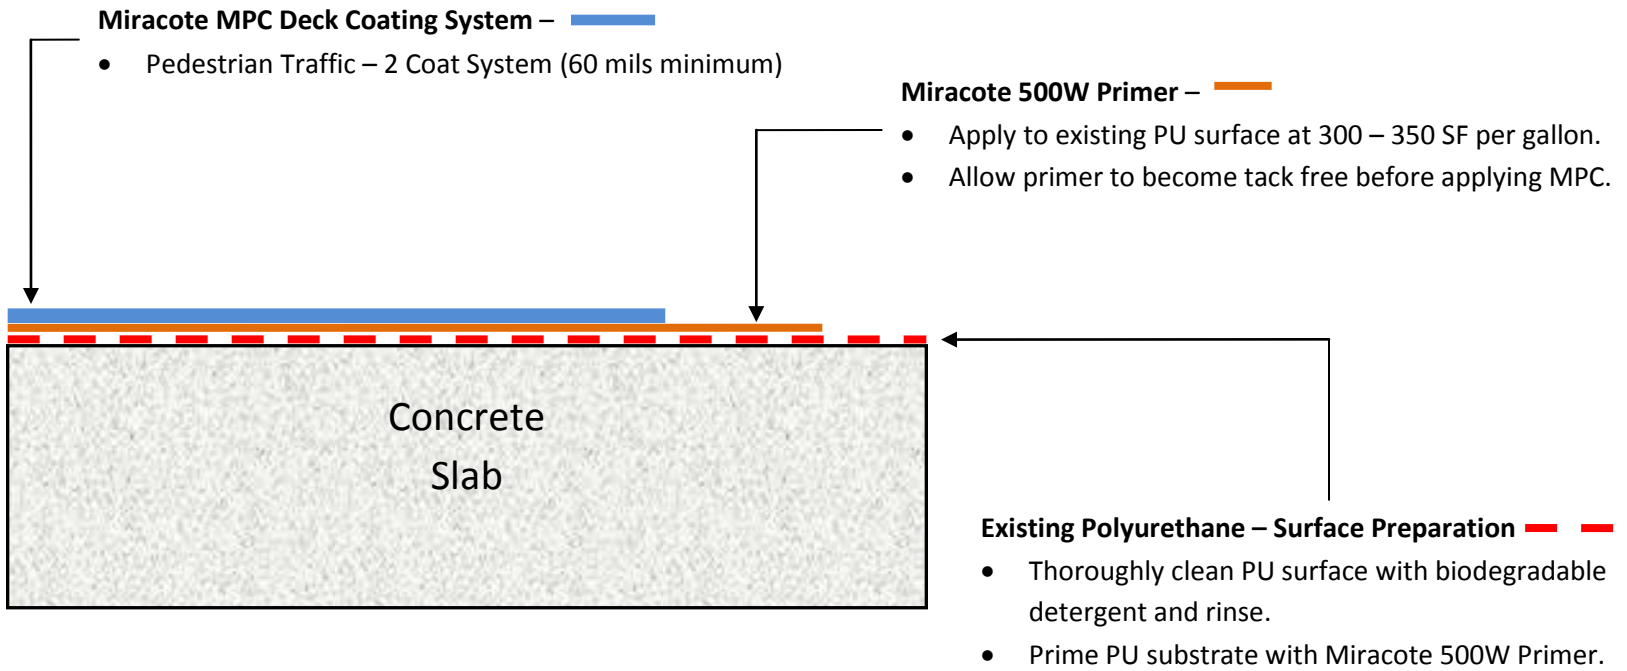

MIR.-MPC-RCPU	RECOAT OVER EXISTING P/U	MIRACOTE Division of Crossfield Products Corp.
08/18/2010	NTS	

Miracote MPC Deck Coating