MIRACOTE

MIRAFLEX III PEDESTRIAN WATERPROOF DECKING SYSTEM

PLYWOOD DECK EDGE FLASHING DETAIL

THESE DETAILS ARE FOR REFERENCE ONLY AND MUST BE REVIEWED BY A DESIGN PROFESSIONAL

****NOT TO SCALE****

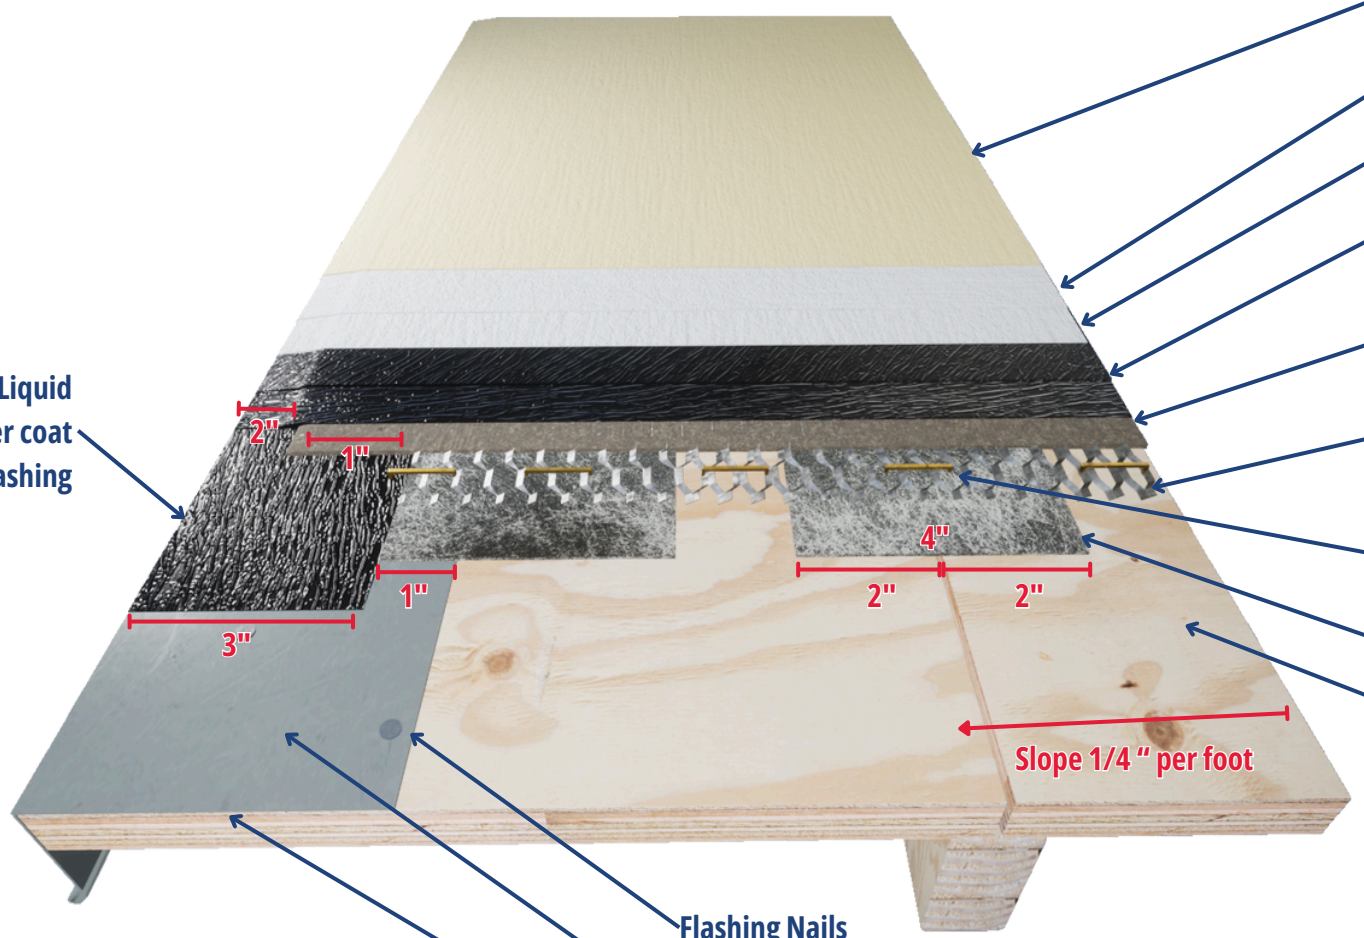

MiraGard Colorbond XL
(2 Coats)

MPC Texture Coat

MPC Protection Coat

MiraFlex Liquid Membrane
(2 Coats)

MiraPatch LM
(Lath Mortar)

1.75 Expanded Metal Lath

MiraFlex Liquid Membrane primer coat on metal flashing

Metal Staple
(1' wide crown & 1/2 " leg length min.)

MiraFlex Seam Tape

Plywood Deck

Flashing Nails
(@ 4" on center in a staggered pattern)

26 GA sheet metal edge flashing. Flashing set in MiraFlex Hybrid Sealant

MiraFlex Hybrid Sealant
(Continuous Bead)

Plywood: Exterior grade minimum 5/8 " sheathing fully blocked, glued and screwed, no deflection.

Important: Consult Crossfield Products Corp. for additional information regarding plywood sheathing, framing/blocking, deck drain types etc.