


NOTES

1. PREPARE EXISTING POLYURETHANE SURFACES BY THOROUGH CLEANING WITH A BIO-DEGRADABLE DETERGENT AS APPROVED BY THE COATING MANUFACTURER. ALLOW TO DRY COMPLETELY.
2. ALWAYS INSTALL MOCK-UPS AND PERFORM INSITU ADHESION TESTS TO VERIFY ACCEPTABLE RESULTS FOR APPROVAL PRIOR TO PROCEEDING WITH RECOAT.
3. APPLY MIRAPRIME WB (INTERCOAT ADHESION PRIMER) OVER EXISTING POLYURETHANE SURFACE AT A RATE OF 300 TO 350 SF PER GALLON.
4. ALLOW PRIMER TO ACHIEVE A TACK FREE CONDITION BEFORE THE APPLICATION OF THE 1ST MPC DECK COAT. OPEN TIME FOR MIRAPRIME WB SHALL NOT EXCEED 16 HOURS (HIGH EVAPORATION RATES) TO 24 HOURS (LOW EVAPORATION RATES), DEPENDING ON ATMOSPHERIC CONDITIONS. REPRIME IF OPEN TIME HAS BEEN EXCEEDED. CONSULT WITH MANUFACTURER AS CONDITIONS MAY REQUIRE.
5. INSTALL MIRACOTE MPC DECK COATING SYSTEM IN ACCORDANCE WITH WRITTEN SPECIFICATIONS AND MANUFACTURER’S PTDS AND INSTALLATION GUIDELINES.

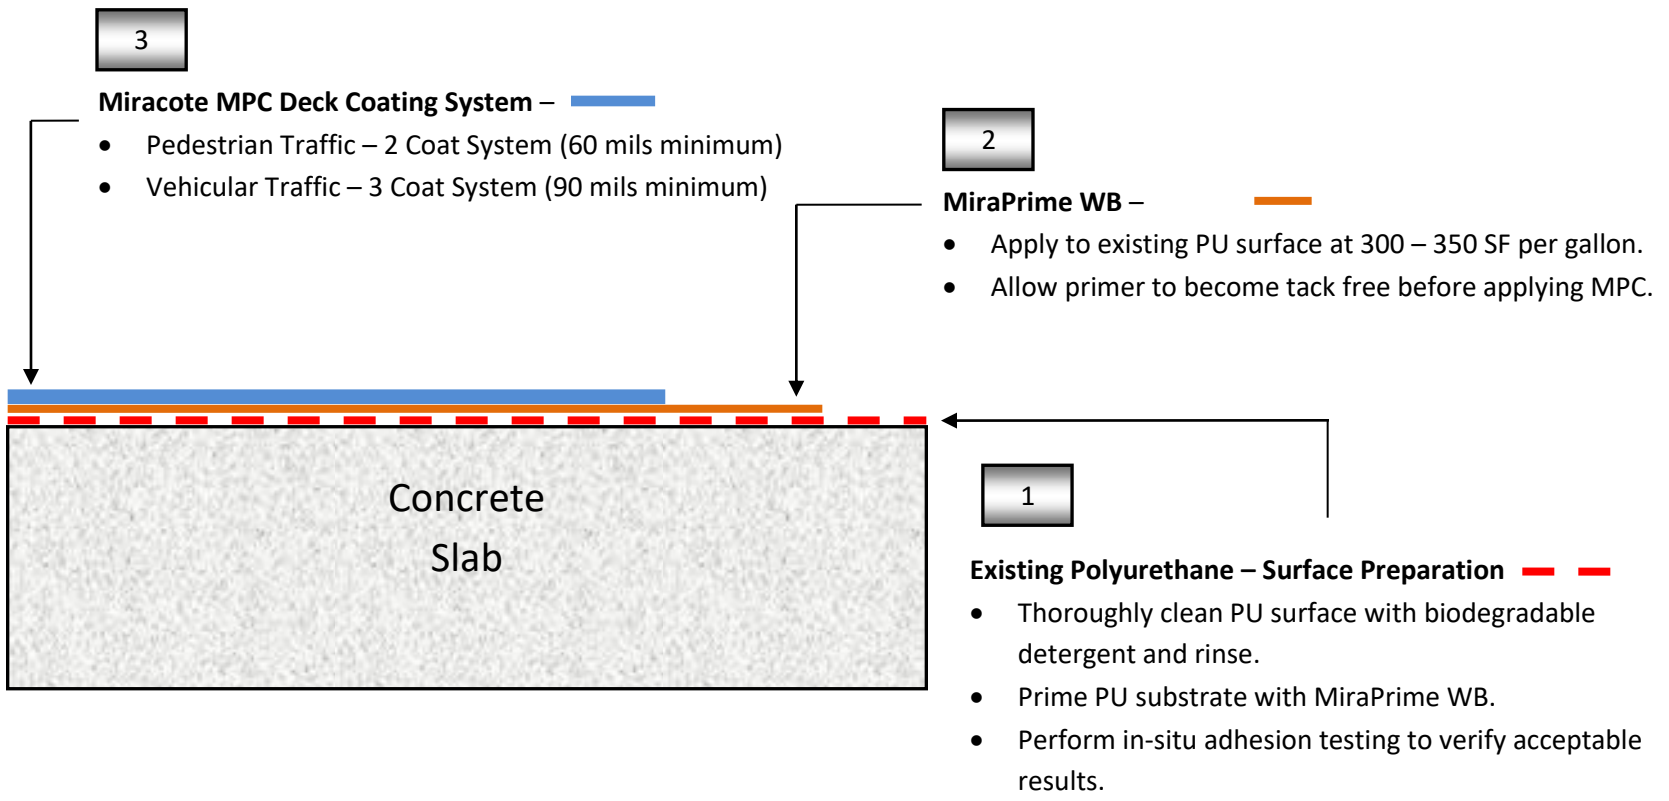

MIR.-MPC-RCPU	RECOAT OVER EXISTING P/U	MIRACOTE Division of Crossfield Products Corp.
02/04/2026	NTS	

Miracote MPC Deck Coating